

B&B Machines

8, Sidhdhapura Estate, Nr. Hanuman Temple, Opp. DGP Windsor, G. I. D. C. Vatva, Ahmedabad - 382 445. Gujarat. INDIA
 Phone : 91-79-64507809 Email : info@bakaraniabrothers.com URL : www.bakaraniabrothers.com

Technical features

- Vertical Axis, inverted carriers
- Heat treated braided plate and track
- Heat treated horn gears and horn plate
- Overload motor protection
- Line forward/ reverse jog
- Automatic machine shut off for broken end, empty bobbin
- Integrating sound proofing enclosure
- AC motor with frequency converter for speed adjustment


Optional attachment

- Caption take off with frequency converter synchronized with main drive
- Meter Counter
- Lay Length Control

Application

- Gland Packing
- Composites

3 - Track Packing Braiding Machine

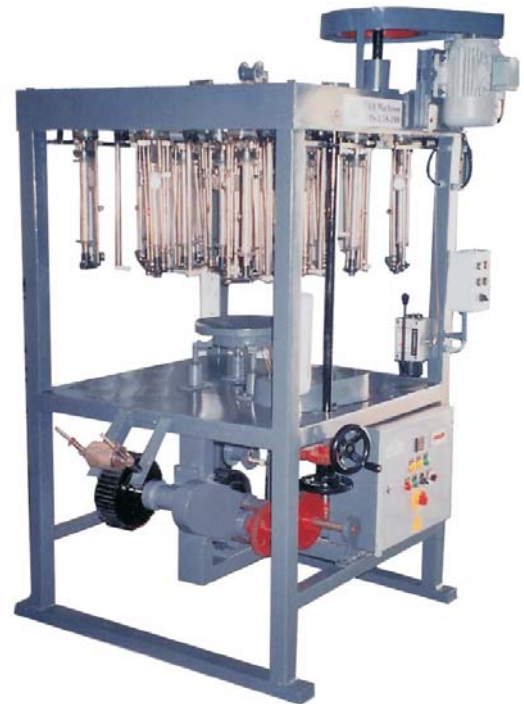

Technical Specification

Description	BMS-3/12-192	BMS-3/12-224	BMS-3/18-264	BMS-3/18-288	BMS-3/20-320	BMS-3/24-352
Length (L)	730	825	950	1050	1130	1220
Depth (D)	860	950	1080	1180	1250	1350
Height (H)	1800	1800	1900	2000	2100	2100
Carrier	12	12	18	18	20	24
Horn Gear Speed	130	100	85	65	50	55
Bobbin Size	70x180	80x220	70x250	70x285	90x320	70x285
Control Volume	600	995	835	955	1775	995
O/D of Braid	12	16	25	25	28	32
Carrier Tension	10 N ~ 40 N	10 N ~ 40 N	10 N ~ 40 N	10 N ~ 40 N	10 N ~ 40 N	10 N ~ 40 N
Motor (Ph/ Kw/ V)	3/ 0.375/ 415	3/ 0.75/ 415	3/ 1.10/ 415	3/ 1.10/ 415	3/ 1.50/ 415	3/ 1.50/ 415
Option						
Caption Take off	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Take off on Drum	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Empty Bobbin Control	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>
Meter Counter	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>
Housing with Safety Doors	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>
Infinitely Variable Speed Control	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>
Infinitely Variable Speed Control	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
● Standard ○ Option						
Material	Asbestos/ non-asbestos					

Standard Supply Voltage: - AC 3-Phase & Neutral, 415 Volt, 50 Hz

The manufacturer reserves right to change design/specifications because of continuous development.
 Accessories/attachment shown on the photograph may not be part of standard machine.
 Maximum speed shown above is indicative only and actual output will depend on the type of fiber.